


**Static and rate-of-rise detector with very low current consumption and simple installation. EN54-5 certified, for dusty and difficult environment applications.**



## FEATURES

- Rate of rise heat detector with static upper limit at 57°C, EN 54-5 certified
- Low profile and surface mounting bases with 4 x 20 mm knockouts
- Independent easy to plug detector head with removal protection
- Nickel-plated bronze double clip terminals for double faced connections
- SMD electric circuit fully encapsulated . Approved components
- Wide voltage supply range: 12 -30 Vcc. Very low current requirement
- 360° visible alarm led and remote indicator connection
- White ABS thermoplastic enclosure with installation dust cover.
- Approval certification by Applus nr. 0370-CPD-532 : A2 class
- Dimensions: 100 x 36 mm ( diameter x height)

## WIRING

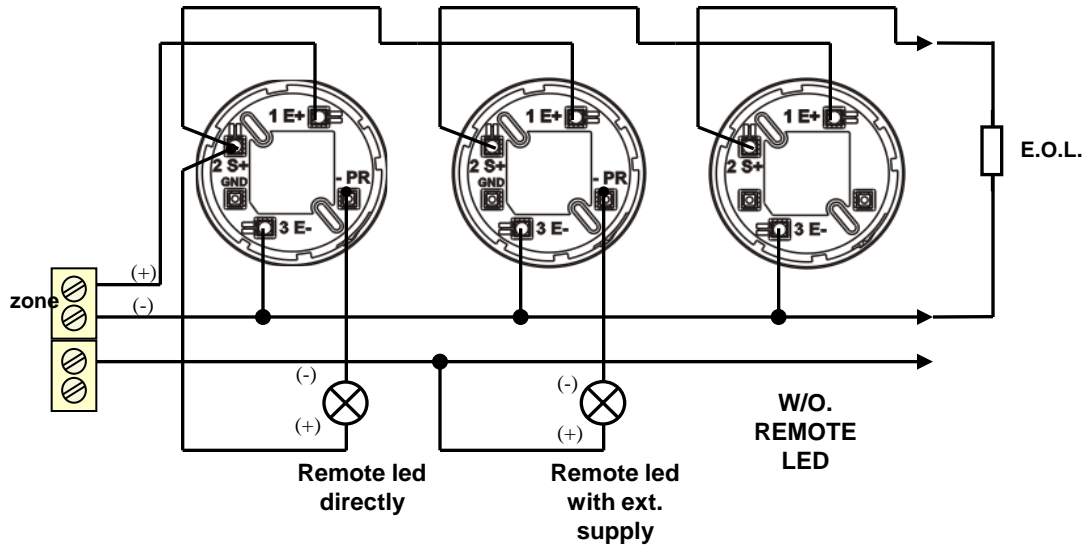

## TECHNICAL SPECIFICATION

Supply voltage:	12 - 30 Vcc
Average quiescent current :	15 uA @24V
Alarm current @ 24 V:	20 mA
Remote output:	100 mA maximum
Normal operating temperature:	-10°C to 60°C
Maximum operating humidity:	95% without condensation



INSTALLER / DISTRIBUTOR