

**ADDRESSABLE OUTDOOR SOUNDER  
BEACON WITH ISOLATOR**

**FEATURES**

Outdoor fire alarm sounder with blinking light signal type B, and Individual addressing technology. Sound in synchronized phase with the rest of the sounders, 95dB acoustic power. Red polycarbonate housing with the word "Fire".

**APPLICATION**

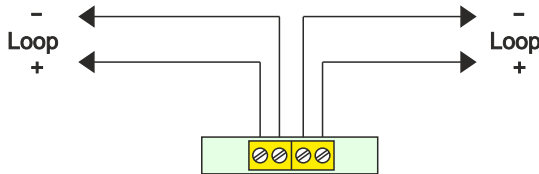
Acoustic and visual outdoor sounder for M450A Fire Detection System

**PHYSICAL**

Wall mounting casing 298 x 197 x 58 mm

**TECHNICAL SPECIFICATION**

Supply:	15 Vcc to 38 Vcc
Current drain stand by:	70 uA @ 24V
Current drain when triggered:	12 mA @ 24V
Sound output:	95 dB @ 1 m
Operating temperature:	-10°C to 70°C
Storage temperature:	-20°C to 80°C
Humidity:	95% not condensed
IP ingress protection:	IP33

**WIRING DIAGRAM**

**MOUNTING PLATE**
